


SMART Pallet Station w lift

1250 kilo

Product number | RI-00503

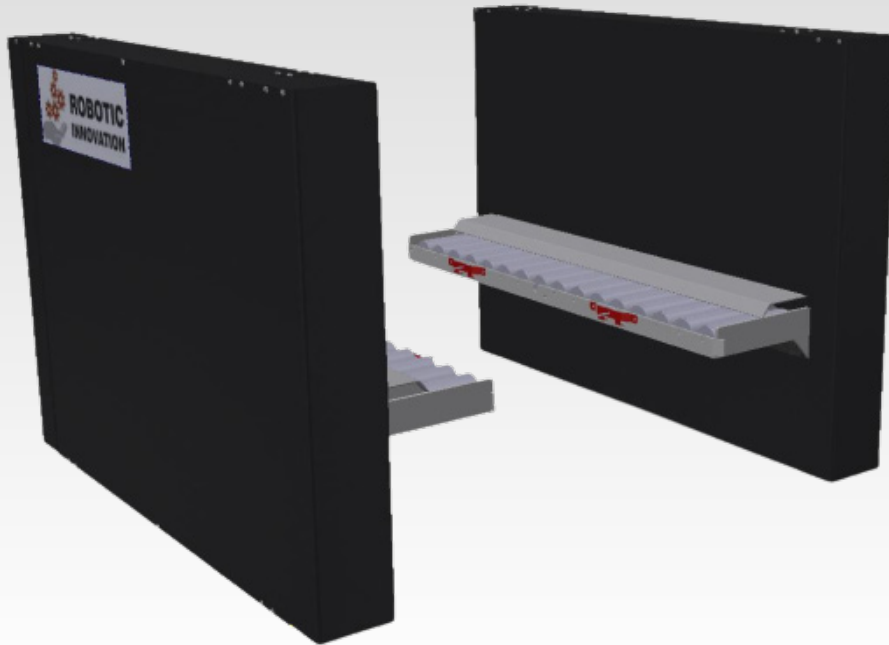

Max Payload

1250 kilo

Capacity

20/h

Compatible

MiR 600/1350

Features

- Various delivering height
- Single EU pallet handling
- Sensor for pallet detection
- HMI for status and setup
- Ethernet communication
- Easy installation
- Easy intergartion towards existing convoyer system
- Safe operation



PURCHASE INFORMATION

Product number RI-00503 Smart pallet station w/lift 1250 kilo



GENERAL INFORMATION

Type	Smart Pallet station with lift 1250 kilo
Color	RAL 7021 Fine Structure
Cover material	Powder painted
Product design life	10 years

DIMENSIONS

Length	1400 mm
Width	1500 mm
Height	1000 mm
Height top roller	450 mm
Weight	300 kilo

PAYLOAD

Maximum payload	1250 kilo
Standard EU Pallets	800 x 1200 x 144 mm

LIFTING HEIGHT

Variable	
Minimum	450 mm
Maximum	920 mm

Capacity

20/h	Depends on theMiR load operation and aisle width to operate with a fleet at common convoyer
------	---

ENVIROMENT

Enviroment	For indoor use only
Ambient temperature range	5°C to 40°C
Humidity	10–95% non-condensing



SAFETY

Service switch	For maintenace
Emergency switch	3 pieces. 2 on station, 1 on control panel

HMI & CONTROL PANEL

Control panel	Integrated in station
4,3" Display	For easy setup and status
OPCUA	Communication



POWER

Voltage	230 VAC
Current	Max 20 A
Frequency	50 Hz
Phase	2
Power	1000 W

APPROVAL

CE Approved	CE approved and compliant with 2006/42/EC machinery directive This is your guarantee for a product in accordance with the given health, Safety and environment requirements.
-------------	---